



Captive M6  
Socket Head Screw (3x)  
**NOTE: Tightening torque 6 Nm**

M6x1.5D Locking Helicoil (3x)

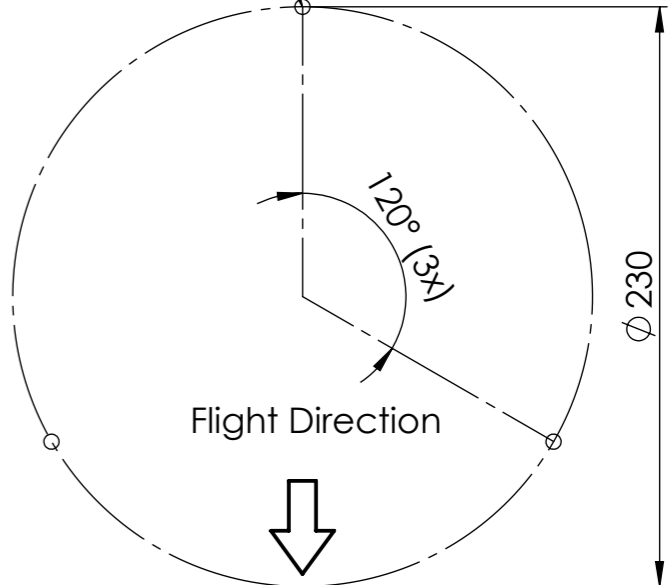


Hole Pattern

CN 1 (Power + Comm.)

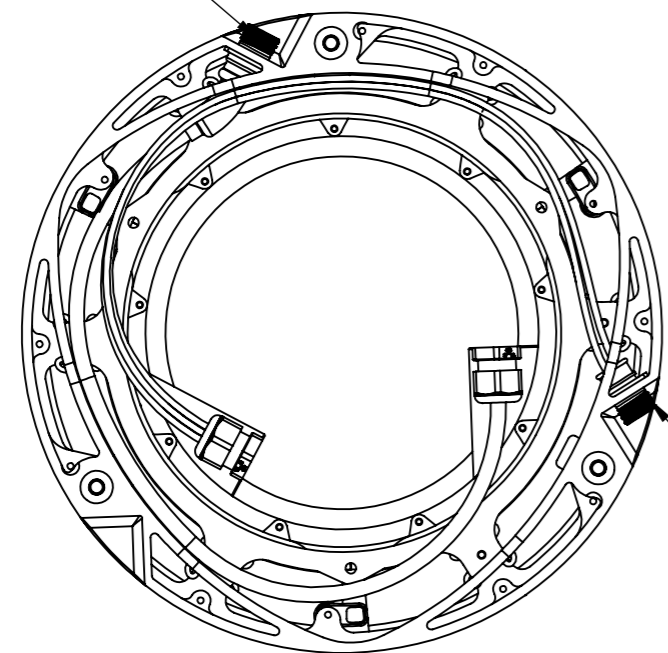

CN 2 (Video)

Flight Direction



The information contained in this document is furnished in confidence. Possession hereof in no way constitutes any rights to use, reproduce or disclose the document, in whole or in part, except as authorised by DST Control AB. Copyright DST Control AB as per date of issue hereof. All rights reserved.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ±0.1 ANGULAR: ±0.1		FINISH:	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	PAPER SIZE A3	
DRAWN: AL		DATE: 2014-06-02	 ÅKERBOGATAN 10, SE-582 54 LINKÖPING SWEDEN, PHN / FAX +46 13 211080 / 211081 www.dst.se, info@dst.se	CLIENT DST Control		
CHK'D				PROJECT/PART GUA1302S01 Mount Instruction OTUS U250		
APP'VD				FILE/PART NO. ICD1203S01	CONFIG. Default	REVISION A
MFG				WEIGHT: 5255.53	SHEET 1 OF 1	
Q.A			VIEW: Sheet1	SCALE: 1:3		
REV.						
STATUS:						